


DYNOFORCE PROFILE

DynoForce design, supply and install the widest range of flood protection solutions, Parking Solutions & HVM products in the world, together with the full spectrum of associated professional services.

Our technical specialists and engineers product, custom-designed Products, including flood barriers, flood gates, flood doors, Security Planter Box, Dock Leveler, Vehicle Restraint System, Crash Rated gates and Crash rated bollards. Our wide solutions are installed throughout the world.

DynoForce operates globally, the International Head Office is in India, with a principal subsidiary in India. With global partners and distributors, DynoForce provides solutions virtually anywhere in the world.

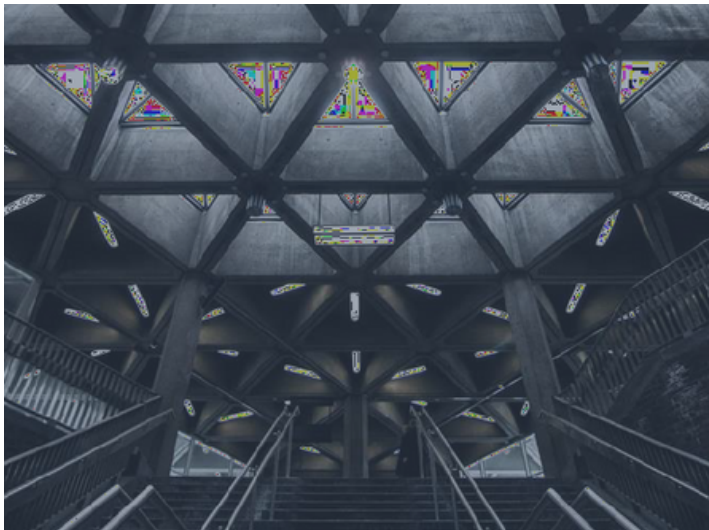

DYNOFORCE

DF-NCR-BFG

Website: www.dynoforce.in
Email: info@dynoforce.in

PRODUCT RANGE:

- Manual / Automatic Flood
- Gates. Parking Systems. HVM
- Crash Rated Product Manual/
- Automatic Gates. Dock
- Leveler. Vehicle Restraint
- System.

BI-FOLD GATE:


DF-NCR-BFG

Description

The Bi-Fold Gate is a high-performance, gate designed for rapid and efficient vehicle access control. Its innovative folding mechanism ensures minimal space usage, making it an ideal solution for locations with limited room for traditional swing gates. Constructed from high-grade steel, it combines durability with a sleek design, suitable for both commercial and residential installations.


Features and Benefits

- 1.Space-Saving Design: Perfect for compact installations with limited space.
- 2.Durable Construction: Built with corrosion-resistant stainless steel for long-lasting use.
- 3.Customizable Options: Available in a variety of sizes and finishes to suit project-specific needs.
- 4.Rapid Operation: Ensures quick entry and exit, reducing wait times.
- 5.Safety Features: Optional safety sensors to prevent accidents.
- 6.Weather Resistant: Engineered to withstand harsh environmental conditions.

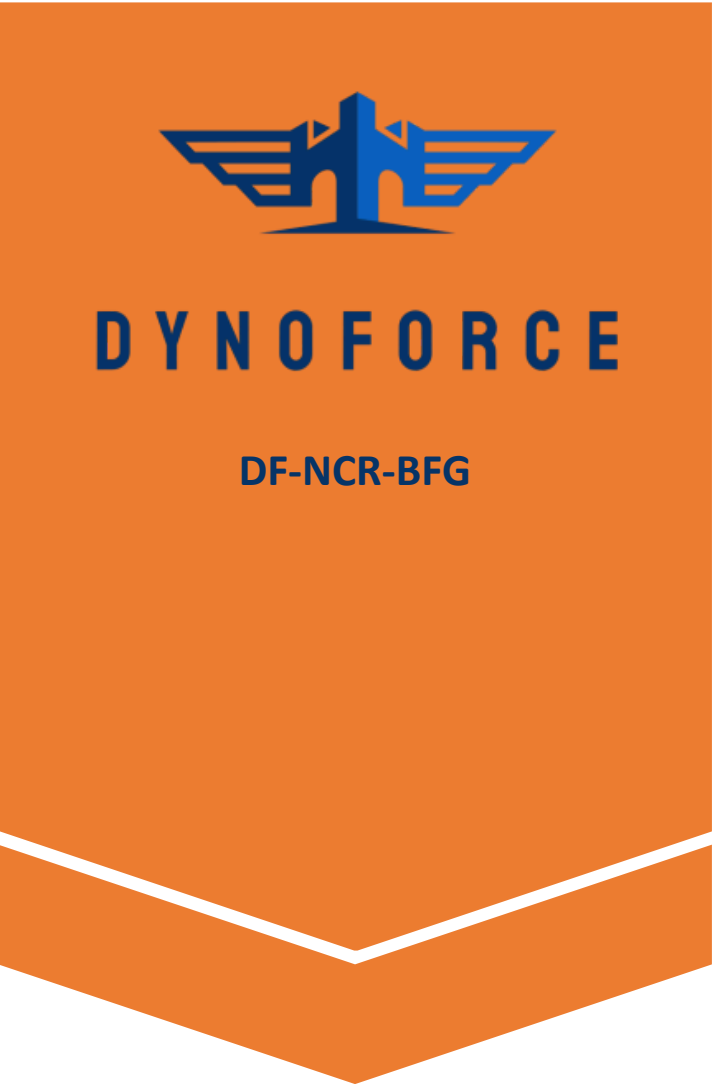

Key Features

- Height: 2.9m with 100mm spikes.
- Width (Clear Opening): 4m
- Material: High Grade steel.
- Finish: Galvanized or powder-coated with customizable RAL colors
- Operation: Manual or automated (motorized option)
- Opening/Closing Speed: Approximately 8–10 seconds (motorized)
- Folding Mechanism: 180-degree folding for space efficiency

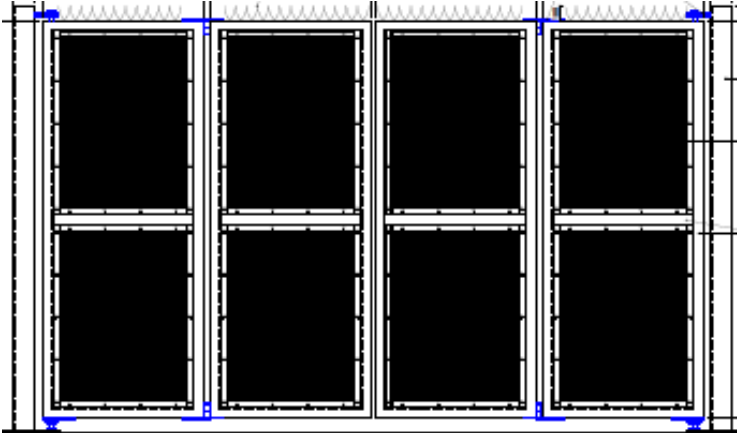

DF-NCR-BFG

Installation and Maintenance

- Foundation Requirements: Requires a robust concrete foundation for stability.
- Motor and Power Unit: Optional motorized system for seamless automated operation.
- Site Preparation: Electrical and groundwork setup necessary for motorized models.
- Maintenance: Minimal maintenance required due to durable materials and design.

Disclaimer

- Specifications are subject to change without prior notice. Contact the sales team to confirm critical dimensions and features.



Applications

- Commercial Properties: For vehicle access control in office complexes and malls.
- Residential Complexes: Ensures secure and efficient entry/exit for gated communities.
- Industrial Sites: Manages access to warehouses, factories, and logistics hubs.
- Government Buildings: Adds an extra layer of access control to sensitive installations.

